

Fragen? Questions? Questions?



<https://www.init7.net/de/support/faq/>

<https://www.init7.net/en/support/faq/>

<https://www.init7.net/fr/support/faq/>

Lieferumfang. Delivery summary. Composition de la livraison.



✓ FRITZ!Box 5530.

✓ Anleitung.
✓ Manual.
✓ Instruction.



✓ Ethernetkabel.
✓ Ethernet cable.
✓ Câble Ethernet.



✓ Glasfaserkabel.
✓ Fibre optic cable.
✓ Câble à fibre optique.

✓ Netzteil.
✓ Power supply.
✓ Bloc d'alimentation.



Passwort.
Password.
Le mot de passe.



OTO-Dose.
OTO socket.
Prise OTO.

Init7


Init7 (Schweiz) AG
Technoparkstrasse 5
CH-8406 Winterthur

info@init7.net
www.init7.net
+41 44 315 44 00

Anleitung Manual Instruction Hybrid7 (XGS-PON)

FRITZ!BOX 5530

Init7

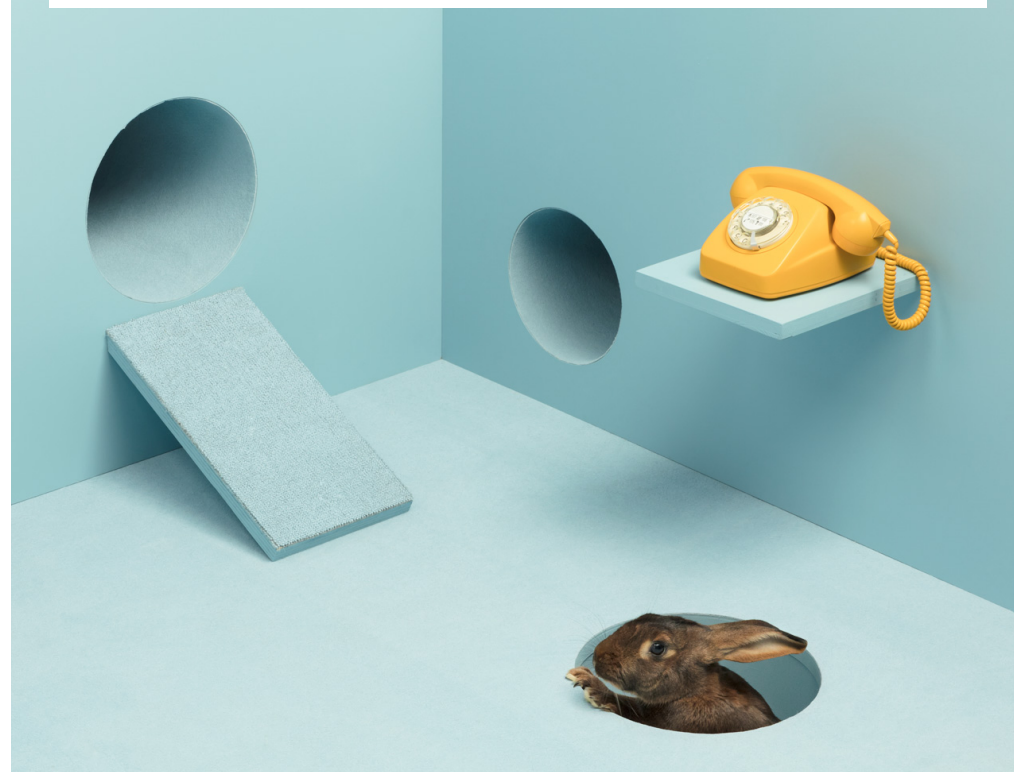

Installation guidelines FRITZ!Box 5530


1 CONNECTING THE COMPONENTS

1. Use the provided fibre patch cable to connect the FRITZ!Box to the OTO socket.
2. Connect the FRITZ!Box to the power supply.
3. Connect your computer to the FRITZ!Box with an Ethernet cable or via WLAN.

2 BASIC CONFIGURATION OF THE FRITZ!Box


1. Open now a web browser and enter <http://fritz.box>.
2. Go to «System» and select «Region & Language».
3. In the «Regional Options» select «Switzerland» as the country and click «Apply»

Attention: Due to firmware updates, the layout of the overview page may change.

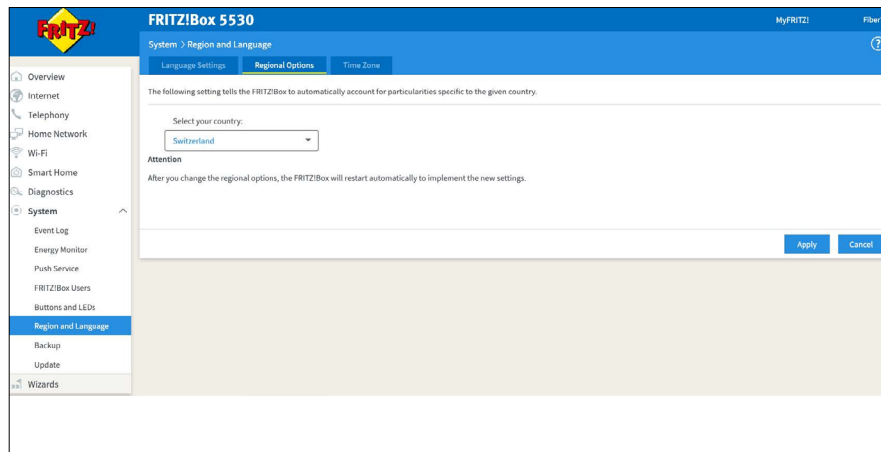


3 OVERVIEW PAGE

1. The overview page opens.
2. Check whether the «Fiber» field is lit green. If the fibre is not green, call our support hotline 044 315 44 00.

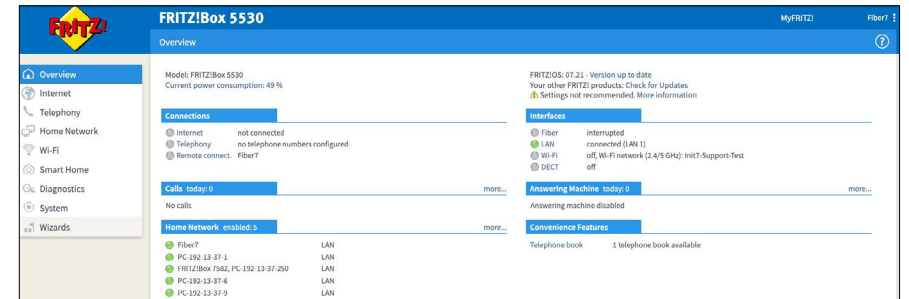


4 CONFIGURE SETTINGS FOR THE ACTIVATION

1. Select «Advanced View» in the window on the right.

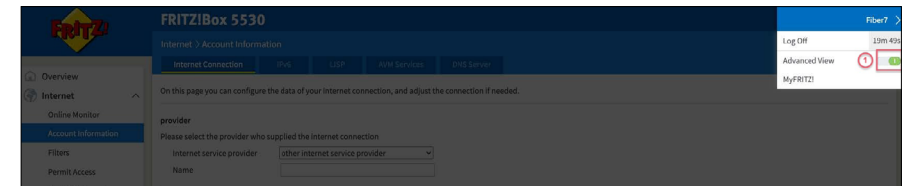

2. Select «Internet» → «Account Information» in the column on the left.
3. Select «Internet» → «Internet Connection» in the left-hand column.
4. Select «Other internet service provider» under «Name» enter «Init7».

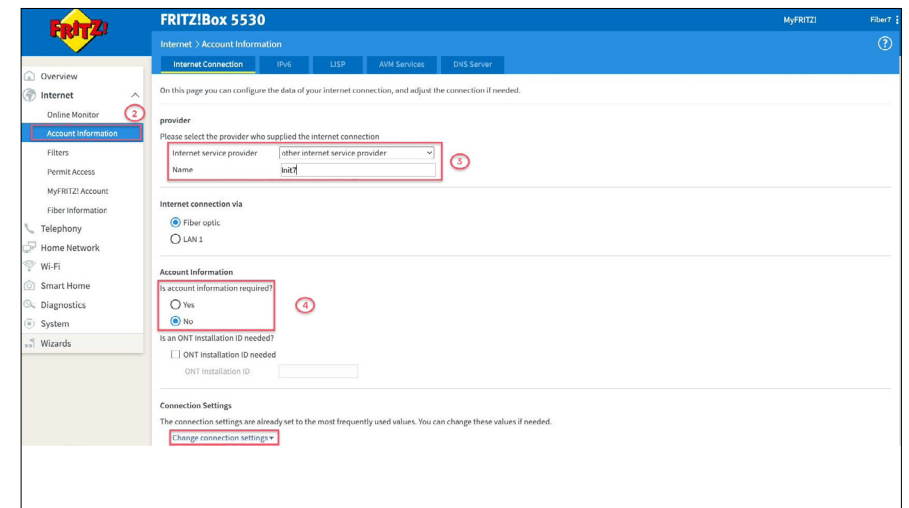

5. Select «No» under «Is account information required?» and expand your settings with a left click on «Change connection settings».

6. To finalise please click on «Apply».

5 OPEN SWISSCOM-SPLASHPAGE

Now open a new window in your browser. The Swisscom splash page should open automatically. If this is not the case, please try using the browser on your smartphone or another device.

6 ON THE SWISSCOM-SPLASHPAGE

1. Enter the OTO ID. The OTO ID is the number of your fibre optic socket (for example B.777.777.777.X).
2. Enter the plug number (socket number).
3. Enter the activation code you received from us.
4. Click on «Activate».

7 ACTIVATION PROCESS

The following page should now open. Leave the page open until it refreshes itself. You have time to drink a coffee ;-). If the confirmation does not happen automatically after 30 minutes, refresh the page and proceed to point 9.



8 ACTIVATION CONFIRMATION


As soon as the page reloads, the activation of the connection is confirmed.



9 CONFIGURE PPPOE & VLAN TAGGING

1. Reconnect you on <http://fritz.box>.
2. Chose in the right upper corner «Advanced View».
3. Select in the left-hand column «Internet» and then «Account Information».
4. Make sure that the Internet connection is provided via «Fiber optic».
5. Select «Yes» under «Is account information required?» and enter username and password according to the datasheet (this was sent to you along with the order confirmation by e-mail).

6. Scroll down and choose «Change connection settings».
7. Select «Use VLAN for Internet access».
8. Enter the value «11» in the box «VLAN-ID».
9. Save the settings.

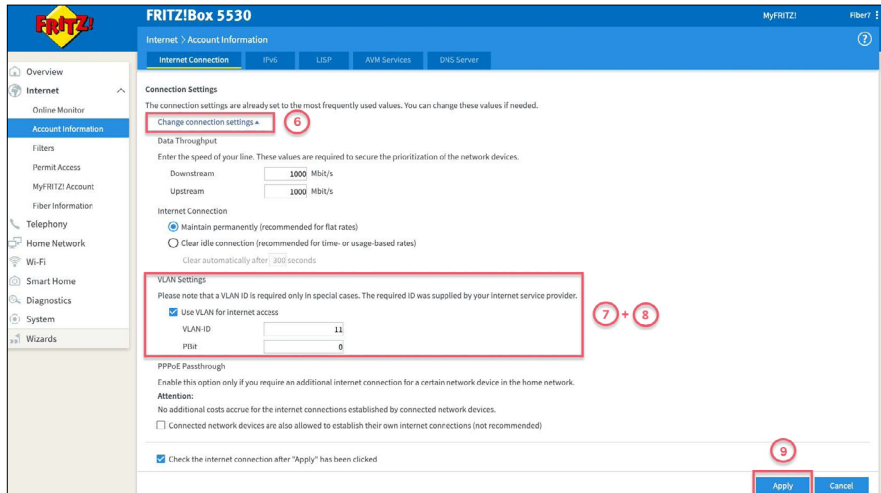

10 IPv6 SETTINGS (OPTIONAL)

1. Change to the tab «IPv6».
2. Activate IPv6 according to the following illustration.
3. Save the settings.

